


MODIFIED ALKYDS (URETHANE)

SINGLE PACK PU HAVING GOOD AIR DRYING WITH EXCELLENT GLOSS AND ABRASION RESISTANCE SUITABLE FOR WOOD FINISHES, FLOOR ATINGS EXCLUSIVELY FOR INTERIOR AND EXTERIOR COATINGS. ALSO SUITABLE FOR TOUCH WOOD.

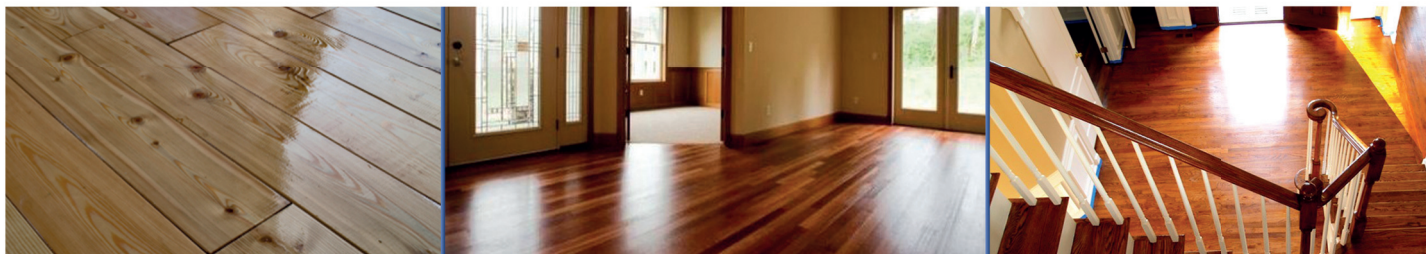

PRODUCT CODE	TYPE OF OIL	%OIL (Approx)	Isocyanate type	COLOUR ON GARDNER	VISCOSITY ON B4 @ 30°C	A.V. mg KOH/gm	% NVM (Volatile solvent)	DESCRIPTION/ USES
LC SA 825	Veg.oil/ Fatty acid	60.0±1.0	TDI	5 MAX	130+ 20 SEC 50% in W/S	2 MAX	55 ± 2 (W/S)	Faster air drying industrial finishes, good gloss, good adhesion to wood finishes, very good hardness.
LC SA 826	Veg.oil/ Fatty acid	60.0±1.0	TDI	5 MAX	90+ 20 SEC 50% in W/S	2 MAX	55 ± 2 (W/S)	Air drying industrial finishes, good gloss, good adhesion to wood, very good hardness and abrasion resistance.
LC SA 827	Veg.oil/ Fatty acid	60.0±2.0	TDI	5 MAX	100+ 20 SEC 50% in W/S	2 MAX	60 ± 2 (W/S)	Fast air drying industrial finishes, good gloss, good touch wood, good hardness.
LC SA 828	Veg.oil/ Fatty acid	60.0±2.0	TDI	5 MAX	80 ± 20 SEC 50% in W/S	2 MAX	60 ± 2 (W/S)	Air drying industrial wood finishes, good gloss, good adhesion, very good hardness and good yellowing properties.